

5000CO2

CO2 monitoring

The Hanwell 5000CO2 radio telemetry transmitter has been specifically designed to monitor CO2 and temperature. The units are in IP65-rated cases and are suitable for use in tough environments.

HANWELL 



The unit has been fitted with a custom-designed LCD to indicate current readings, battery life remaining and alarm conditions. Data is transmitted wirelessly to a local networked server for real-time alarms and historical analysis. These have been used for a multitude of applications including monitoring laboratory incubators. The transmitters are powered by a permanent 12V DC power supply.

Product Features

- Wireless data transfer
- High performance technology with accurate sensors and probes
- LCD display with data readings and battery life
- User accessible battery and USB socket
- Low power radio for long distance transmission (Over 3km over open ground)
- Complies with RoHS, EU and WEEE directives
- Carries CE Marking

Benefits

- Assists with national regulatory compliance
- Provides users with the tools to maintain a stable environment
- Reduces the risk of contamination or loss

Always ask for a long-range signal strength test.

We can prove ours to be unrivalled.

CE  RoHS

TECHNICAL SPECIFICATIONS

Instrumentation Specification:


Dimensions	197 x 106 x 60mm
Weight	300 grams
Power Supply:	External 12V DC
Case Material:	ABS

Radio Transmitter Functions:

Frequency Options	A range of frequencies are available between 433-458MHz. Country specific regulations apply.
Radio Power:	10mW
Radio Range:	3km over open ground
Software required:	W700 – Standard Synergy Software Package W706 – Validated Synergy Software Package *See Synergy datasheet for further options
Hardware required:	SR2 – Smart Receiver REP – Repeater (where required)

*This product can be calibrated to your specifications, contact us for further details.
N.B Instrument operating range -20°C to +60°C in a non-condensing RH environment*

Radio system (requires radio receiver)

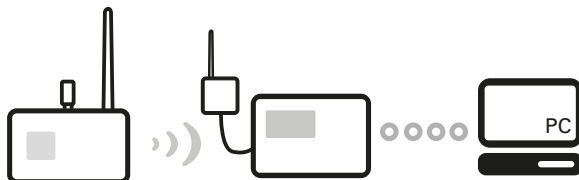

Disclaimer

The information contained herein is believed to be reliable. The IMC Group Ltd is not responsible for any incorrect or incomplete information on this datasheet and the information or product may be changed without notice. Customers should obtain and verify the latest relevant information before placing orders for IMC products.

Version 2

5016



Radio transmitter code: RL5016-434.075 (other frequencies are available)

SPECIFICATIONS

CO2 Sensor Specification:

CO2 Sensor	Dual Beam Infra Red
Range	0 to 5%
Accuracy	± (1.5% of range + 2% of reading)
Operating Range	700 to 1300 mb

Temperature Sensor Specification:

Temperature Sensor	4 Wire PT100
Recommended Range	-20°C to +60°C
Accuracy	+/- 0.1°C
Resolution	0.1°C

5016 – Radio transmitter

Dual channel transmitter. Fitted with LCD. Range 0 to 5%

5018



Radio transmitter code: RL5018-434.075 (other frequencies are available)

SPECIFICATIONS

CO2 Sensor Specification:

CO2 Sensor	Dual Beam Infra Red
Range	0 to 10%
Accuracy	± (1.5% of range + 2% of reading)
Operating Range	700 to 1300 mb

Temperature Sensor Specification:

Temperature Sensor	4 Wire PT100
Recommended Range	-20°C to +60°C
Accuracy	+/- 0.1°C
Resolution	0.1°C

5018 – Radio transmitter

Dual channel transmitter. Fitted with LCD. Range 0 to 10%