

EE33-M

Humidity and Temperature Transmitter for High-end Meteorological Applications

EE33-M is optimized for reliable measurement under demanding weather conditions. Besides accurate measurement of relative humidity (RH) and temperature (T), the device calculates all additional physical quantities like dew point temperature, absolute humidity and mixing ratio. A dual heating system prevents condensation on the RH sensor, on the sensing probe and on the filter cap, which leads to extremely short response time and fast recovery after condensing conditions. The measuring principle with separate RH and T probes enables precise continuous measurement even at permanent high humidity.

The proprietary E+E coating protects the RH sensor and its leads against corrosive and electrically conductive pollution. The probes are compatible with modern, ventilated radiation shields, like the LAM630.

With an optional connecting cable and the EE-PCS software (included in scope of supply) the user can easily perform an adjustment or a configuration of the outputs.

EE33-M
with radiation shield



Typical Applications


meteorology
 wind turbine generators
 road icing warning
 off-shore measurements

Features

monolithic RH sensor
 precise measurement close to condensation
 condensation prevention through dual heating
 protection against pollution and corrosion
 calculation of additional physical quantities

Monolithic Humidity Sensor

The heart of EE33-M is the monolithic HMC01 sensor, developed and manufactured in thin-film technology by E+E Elektronik. HMC01 combines the moisture and heating element on a single substrate. Condensation is prevented by controlled heating of the sensor. The proprietary E+E coating protects the sensor and its leads against pollution and corrosion.

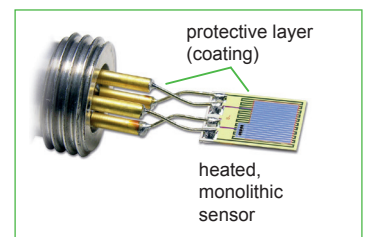

Radiation Shield


In order to minimize the impact of rain, snow, ice and solar radiation on the measurement the EE33-M must be mounted inside a radiation shield.

The radiation shield LAM630 is suitable for mounting onto a mast with 30-35mm diameter. Forced ventilation is provided by the control unit STEG6003. Up to 4 probes can be mounted using cable glands (Ø 18-25 mm).




Network Compatibility / Ethernet Interface

The optional RS485 interface (order code N) allows for building a network of up to 32 transmitters. The measurement data can be collected in a shared database and made available for all kinds of further processing.

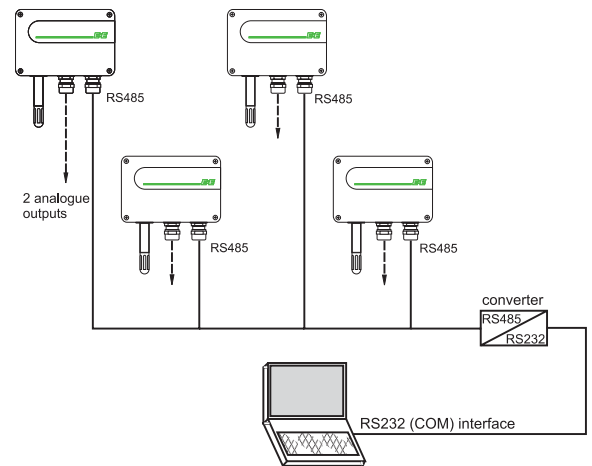


Connection Types

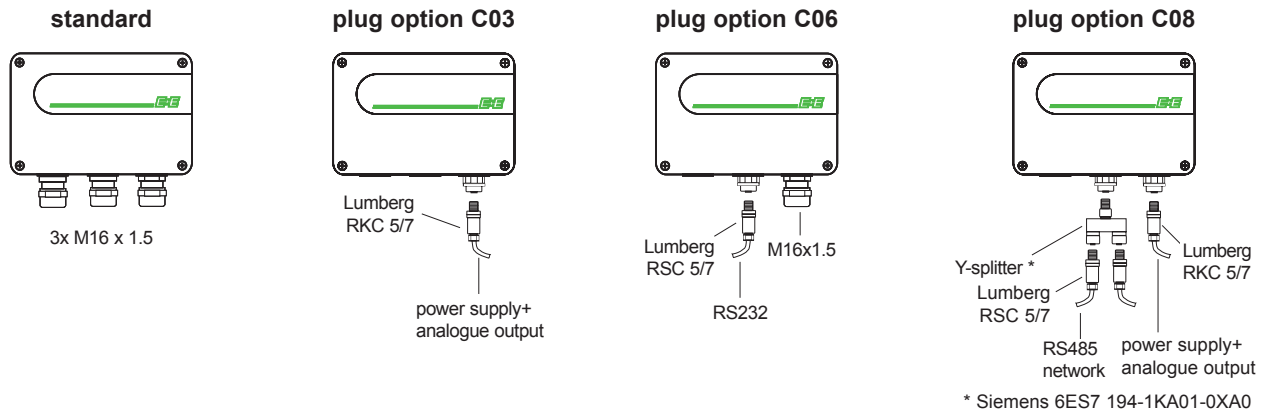


Dimensions (mm)

Housing

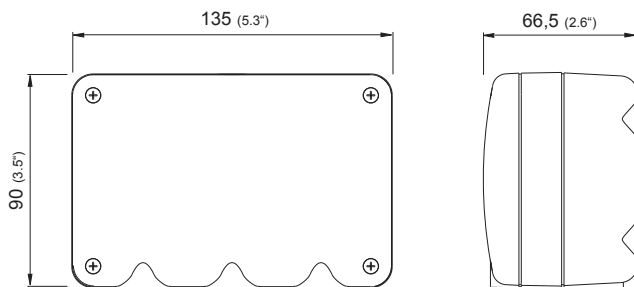

Humidity probe

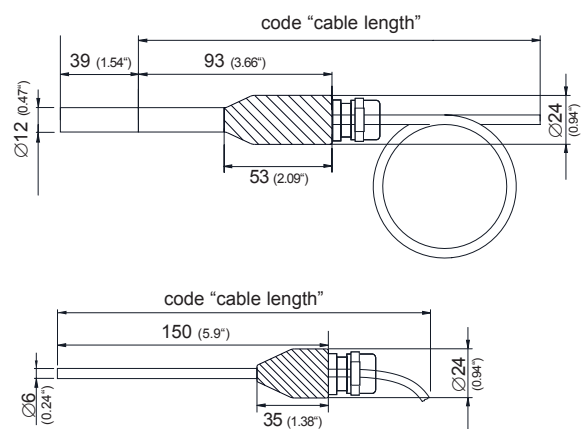

EE33-PFTM

Probe material: stainless steel
 Adapter material: polyoxymethylene
 Cable gland: polycarbonate

Technical Data

Measurement values

Relative humidity

Humidity sensor¹⁾ heated, monolithic HMC01

Working range¹⁾ 0...100% RH

Accuracy²⁾ (including hysteresis, non-linearity and repeatability)

-15...40°C (5...104°F) ≤90% RH ± (1.3 + 0.3%*mv) % RH

-15...40°C (5...104°F) >90% RH ± 2.3% RH

-25...70°C (-13...158°F) ± (1.4 + 1%*mv) % RH

-40...180°C (-40...356°F) ± (1.5 + 1.5%*mv) % RH

Temperature dependence of electronics typ. ± 0.01% RH/°C (0.0055% RH/°F)


Response time t_{90} at 20°C (68°F) < 15s

Temperature

Temperature sensor Pt1000 DIN A

Working range sensing head -40...180°C (-40...248°F)

Accuracy

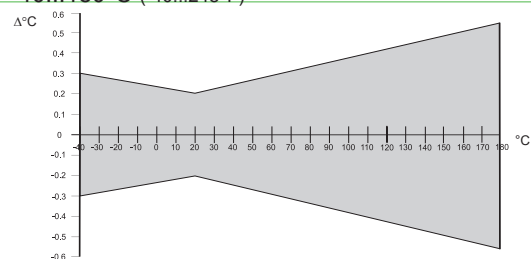

Temperature dependence of electronics typ. ± 0.005°C/°C

External temperature probe Pt1000 (DIN A)

Outputs²⁾

Two freely selectable and scaleable analogue outputs

| | |
|----------|--------------------|
| 0 - 1V | -1mA < I_L < 1mA |
| 0 - 5V | -1mA < I_L < 1mA |
| 0 - 10V | -1mA < I_L < 1mA |
| 4 - 20mA | R_L < 500 Ohm |
| 0 - 20mA | R_L < 500 Ohm |

Digital interface RS232
optional: RS485

Max. adjustable measurement range²⁾³⁾

| | | min. | max. | Unit |
|-------------------------------|----|-----------|--------------|------------------------|
| Humidity | RH | 0 | 100 | % RH |
| Temperature | T | -40 (-40) | 180 (248) | °C (°F) |
| Dew point temperature | Td | -40 (-40) | 100 (212) | °C (°F) |
| Frost point temperature | Tf | -40 (-40) | 0 (32) | °C (°F) |
| Wet bulb temperature | Tw | 0 (32) | 100 (212) | °C (°F) |
| Water vapour partial pressure | e | 0 | 1100 (15) | mbar (psi) |
| Mixture ratio | r | 0 | 999 (9999) | g/kg (gr/lb) |
| Absolute humidity | dv | 0 | 700 (300) | g/m ³ (grF) |
| Specific enthalpy | h | 0 | 2800 (99999) | kJ/kg (Btu/lb) |

General

Supply voltage 8...35V DC
12...30V AC

Current consumption - 2x voltage output for 24V DC/AC: typ. 40mA / 80mA
- 2x current output typ. 80mA / 160mA

System requirements for software WINDOWS 2000 or later; serial interface

Housing / protection class Polycarbonate / IP65

Cable gland M16 x 1.5

Electrical connection screw terminals up to max. 1.5mm² (AWG 16)

Working and storage temperature range of electronics -40...60°C (-40...140°F)

Electromagnetic compatibility according to EN61326-1 EN61326-2-3 ICES-003 ClassA FCC Part15 ClassA




1) Refer to the working range of the humidity sensor.

2) Can be easily changed by software.

3) Refer to accuracies of calculated values (www.epluse.com/feuchtemessung).

*) The accuracy statement includes the uncertainty of the factory calibration with an enhancement factor k=2 (2-times standard deviation). The accuracy was calculated in accordance with EA-4/02 and with regard to GUM (Guide to the Expression of Uncertainty in Measurement).


Working Range Humidity Sensor

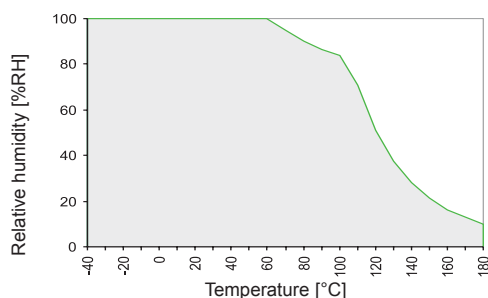

The grey area shows the allowed measurement range for the humidity sensor.

Operating points outside of this range do not lead to destruction of the sensor, but the specified measurement accuracy cannot be guaranteed.

Connection Diagram

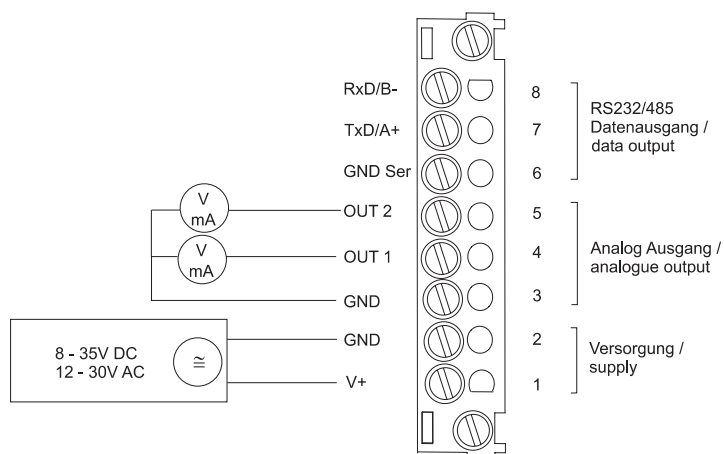

Scope of Supply

- EE33-M Transmitter according to Ordering Guide
- Operation Manual
- Inspection certificate according to DIN EN 10204 - 3.1
- Cable connector RKC 5/7 for customer assembly, only for option **C03** or **C08**
- Cable connector RSC 5/7 for customer assembly, only for option **C06** or **C08**
- Y-junction for network connection, only for option **N** or **C08**
- M16 cable gland, only for option **C03**, **C06** or **C08**

Accessories / Replacement Parts (For further information, see data sheet „Accessories“)

- | | |
|---|--|
| - PTFE stainless steel filter | HA010114 |
| - Exchange membrane for PTFE stainless steel filter | HA010114ME |
| - Stainless steel grid filter | HA010109 |
| | |
| - Interface cable for plug option C06 | HA010311 |
| - RS485 Kit (HW + SW) for network | HA010601 |
| | |
| - Mounting set for mast with Ø 34 - 54 mm | HA010213 |
| | |
| - Radiation shield LAM630 with control unit | HA010508 |
| | |
| - Calibration-Kit | see data sheet „Humidity Calibration Kit“ |
| - Configuration adapter | see data sheet „EE-PCA“ |
| - E+E Product Configuration Software | EE-PCS (download at www.epluse.com/configurator) |

Ordering Guide

| | | EE33-PFTM |
|------------------------|-----------------------|-----------------------------|
| Hardware Configuration | Filter | PTFE stainless steel filter |
| | Cable length | 2 |
| | | 01 |
| | Probe length | 02 |
| | | 2 |
| Software Configuration | Interface | RS232 |
| | Plug | no code |
| | | N |
| | | no code |
| | | C03 |
| Output 1 | Output 1 | C06 |
| | | C08 |
| | | A |
| | | B |
| | | C |
| | | D |
| | | E |
| | | F |
| | | G |
| | Output 2 | H |
| | | J |
| | | A - J |
| | | 1 |
| | | 2 |
| | | 3 |
| | | 5 |
| | | 6 |
| Measured value units | Type of output signal | no code |
| | | E01 |
| | T-scaling | 002 |
| | | 008 |
| | | 024 |

Order Example

EE33-PFTM2022N/AB3-002

Hardware Configuration:

Filter: PTFE stainless steel filter
 Cable length: 2m
 Probe length: see dimensions
 Interface: RS485
 Plug: cable glands

Software Configuration:

Output 1: Relative humidity
 Output 2: Temperature
 Type of output signal: 0-10V
 Measured value units: metric / SI
 T-scaling: -40...60°C