


## EE870

## Modular CO<sub>2</sub> Transmitter for Demanding Applications

The modular E+E CO<sub>2</sub> transmitter EE870 is designed for easy integration into OEM equipment for demanding applications. EE870 consists of a CO<sub>2</sub> sensing probe, a conversion board and a connection cable.

The interchangeable CO<sub>2</sub> probe incorporates the dual wavelength NDIR CO<sub>2</sub> sensor, which compensates for ageing effects, is highly insensitive to pollution and offers outstanding long term stability. A multiple point CO<sub>2</sub> and temperature adjustment leads to excellent measurement accuracy over the entire temperature working range, ideal for use in agriculture and outdoors.

The IP65 enclosure of probe and the replaceable PTFE filter offer excellent protection in harsh, polluted environment. The compact size, the M12 connector and the optional mounting flange allow for fast probe installation, replacement or removal during the cleaning of the site, for instance a stable or an incubator. With the optional radiation shield, the probe can be also installed outdoors.

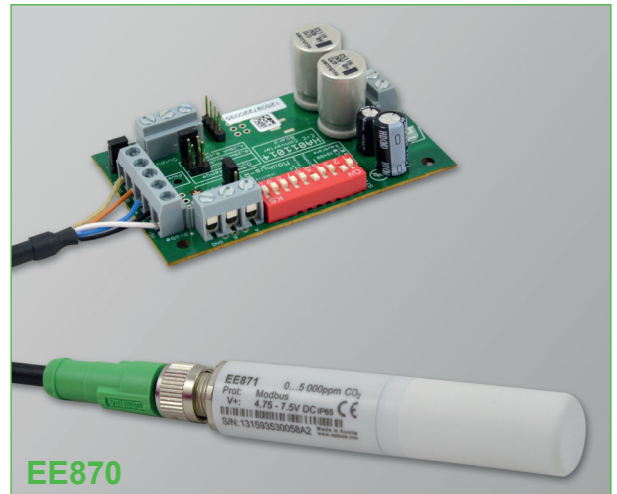

The measured data range of up to 5 % CO<sub>2</sub> (50,000 ppm) is available on the analog outputs of the conversion board. Several voltage and current ranges can be selected with jumpers. Additionally, the data is available on the Modbus RTU interface, which can be configured by the user with DIP switches on the board. An optional kit facilitates easy configuration and adjustment of the probe.

### Typical Applications

Greenhouses and livestock barns  
 Fruit and vegetable storage  
 Hatchers and incubators  
 Outdoor CO<sub>2</sub> monitoring

### Key Features

Auto-calibration  
 Outstanding long-term stability  
 Temperature compensation  
 Interchangeable probe  
 Analogue and Modbus RTU outputs

### Technical Data

#### Digital CO<sub>2</sub> Probe EE871

Measuring principle	Dual wavelength (non-dispersive infrared technology) NDIR	
Measurement range / Accuracy at 25 °C and 1013mbar <sup>1)</sup> (77°F...14,69psi)	0...2000 ppm:	< ± (50 ppm + 2 % from the measured value)
	0...5000 ppm:	< ± (50 ppm + 3 % from the measured value)
	0...10,000 ppm:	< ± (100 ppm + 5 % from the measured value)
	0...3 %:	< ± (1,5 % from full scale + 2 % from the measured value)
	0...5 %:	
Response time t <sub>90</sub>	105 s with measured data averaging (smooth output) 60 s without measured data averaging	
Temperature dependency (-20...45 °C) (-4...113 °F)	0...2000 ppm:	
	0...5000 ppm:	typ. ± (1 + CO <sub>2</sub> concentration [ppm] / 1000) ppm/°C
	0...10,000 ppm:	
	0...3 %:	typ. -0,3 % from the measured value/°C
	0...5 %:	
Housing / Protection class	Plastic PC / Housing IP65	
Cable length	max. 10 m (32 ft)	
Electromagnetic compatibility (Industrial environment)	EN61326-1 EN61326-2-3	




#### Conversion Board

Supply voltage	10-35 VDC / 10-28.8 VAC
Supply current	120 mA at 24 VDC / 300 mA at 10 VDC
Protection class	IP00

1) For averaging output


Electrical connection	screw terminal size: 2.5 mm <sup>2</sup>		
Analog outputs	0-1 V; 0-5 V; 0-10 V	-1 mA < I <sub>L</sub> < 1 mA	
selectable by jumpers	0-20 mA; 4-20 mA	R <sub>L</sub> < 500 Ohm	
Resolution	12 bit		
Response time t <sub>90</sub>	60 s or 105 s selectable by jumpers		
Modbus RTU	setup with dip-switches (see operation manual)		
Temperature dependence	Voltage:	typ. ±0.2 mV/°C (0 – 1V)	
		typ. ±0.5 mV/°C (0 – 5V)	
		typ. ±0.6 mV/°C (0 – 10V)	
	Current:	typ. ±1 µA / °C	
EE870 Operating conditions	-40...60 °C (-40...140 °F)	0...100 % RH (not condensating)	85...110 kPa (12.33...15.95 psi)
EE870 Storage condition	-40...60 °C (-40...140 °F)	0...100 % RH (not condensating)	70...110 kPa (10.15...15.95 psi)

## Connection

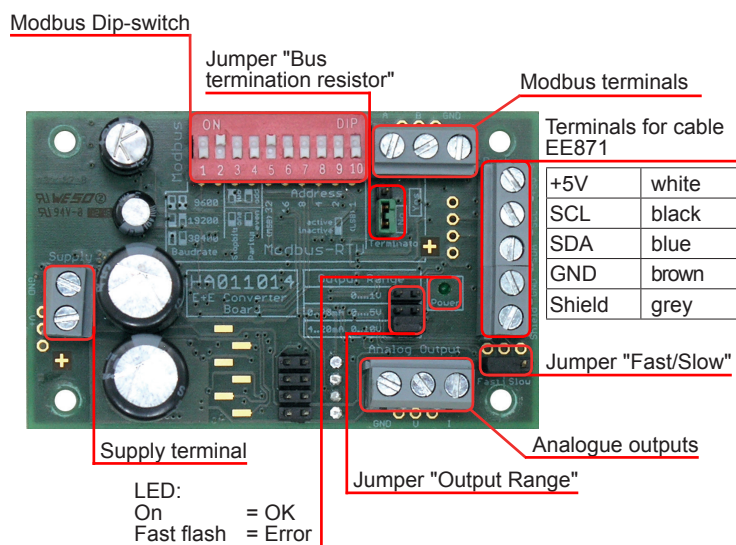


## Dimensions (mm/inch)

### Digital CO<sub>2</sub> Probe EE871

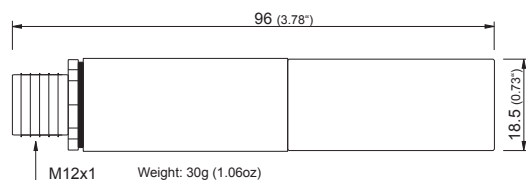

### Conversion Board

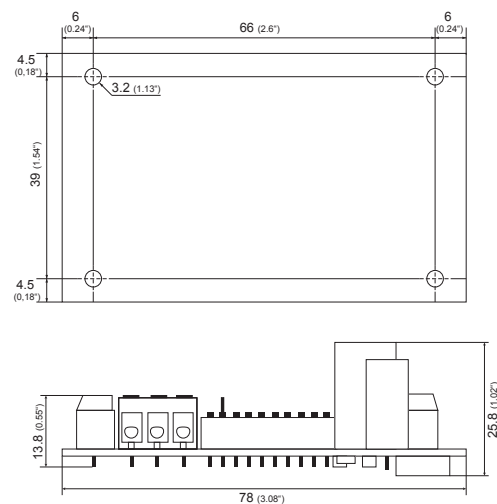


## Scope of Supply

- EE871 probe according to ordering guide
- Test report according to DIN EN10204 - 2.2 for EE871
- Conversion board HA011014
- Connecting cable HA0108xx
- Operation manual
- Test report according to DIN EN10204 - 2.2 for conversion board

## Operation outdoors

For outdoor applications, the probe of EE870 must be used with the radiation shield order no. HA010507, which protects the device against rain, snow, ice, and solar radiation. The converter board must be protected IP65 (NEMA4) or better.

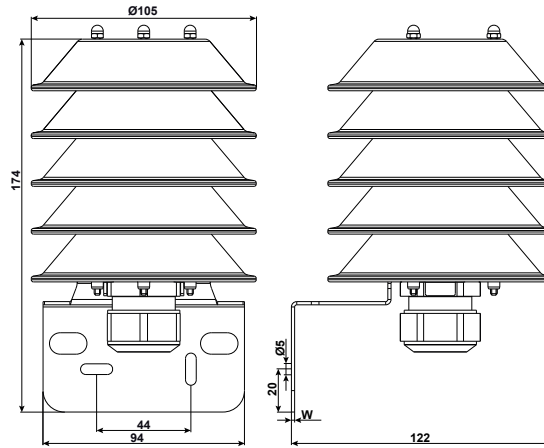

## Ordering Guide

		EE870
CO <sub>2</sub> range	0...2000 ppm	HR2000
	0...5000 ppm	HR5000
	0...10,000 ppm	HR1
	0...3 %	HR3
	0...5 %	HR5
Cable length	1 m	no code
	2 m	KL200
	5 m	KL500
	10 m	KL1000

## Ordering Example

### EE870-HR2000KL500

CO<sub>2</sub> range: 0...2000 ppm  
 Cable length: 5 m

### EE870-HR5

CO<sub>2</sub> range: 0...5 %  
 Cable length: 1 m

## Accessories (see data sheet "Accessories")

Replacement probe EE871-HRxJ2  
 Cable M12 - flying leads (1 m (39.37") / 2 m (78.74") / 5 m (196.85") / 10 m (393.70"))  
 Mounting flange for probe  
 Radiation shield  
 PTFE Filter cap  
 Protection cap for the M12 cable socket  
 Protection cap for the M12 probe plug

see data sheet EE871  
 HA010809/10/11/12  
 HA010212  
 HA010507  
 HA010116  
 HA010781  
 HA010782

## Support Literature

[www.epluse.com/EE870](http://www.epluse.com/EE870)