

EE871

Digital CO₂ Probe for Demanding Applications

The E+E CO₂ probe EE871 is designed for use in harsh, demanding OEM applications. A multiple point CO₂ and temperature adjustment procedure leads to excellent CO₂ measurement accuracy over the entire temperature working range, ideal for use in agriculture or outdoors. EE871 incorporates the dual wavelength NDIR CO₂ sensor, which automatically compensates for ageing effects and is highly insensitive to pollution.

The IP65 enclosure and the replaceable PTFE filter offer excellent protection in harsh, polluted environment. The compact size, the M12 connector and the optional mounting flange allow for fast probe installation or replacement. With the optional radiation shield, EE871 can be also used outdoors.

The measured data range of up to 5 % CO₂ (50,000 ppm) is available on E2 digital interface and up to 1 % CO₂ (10,000 ppm) is available on Modbus RTU interface.



EE871

An optional kit facilitates easy configuration and adjustment of EE871. The measurement interval can be set according to the application requirements, by this the average current consumption can be reduced to 120 µA for battery-operated devices.

Typical Applications

- Greenhouses and livestock barns
- Fruit and vegetable storage
- Hatchers and incubators
- Outdoor CO₂ monitoring
- Data loggers and handhelds

Key Features

- Auto-calibration
- Outstanding long-term stability
- Temperature compensation
- Very low current consumption
- IP65 enclosure
- Modbus RTU or E2 interface

Technical Data

Measured values

CO₂

| | |
|---|--|
| Measuring principle | Dual wavelength (non-dispersive infrared technology) NDIR |
| Measurement range | 0...2000 ppm: < ± (50 ppm + 2 % from the measured value) |
| Accuracy at 25 °C and 1013 mbar ¹⁾ (77 °F...14,69 psi) | 0...5000 ppm: < ± (50 ppm + 3 % from the measured value) 0...10,000 ppm: < ± (100 ppm + 5 % from the measured value) |
| | 0...3 %: < ± (1,5 % from full scale + 2 % from the measured value) |
| | 0...5 %: < ± (1,5 % from full scale + 2 % from the measured value) |
| Response time t ₉₀ | 105 s with measured data averaging (smooth output) 60 s without measured data averaging |
| Temperature dependency (-20...45 °C) (-4...113 °F) | 0...2000 ppm: typ. ± (1 + CO ₂ concentration [ppm] / 1000) ppm/°C 0...5000 ppm: typ. ± (1 + CO ₂ concentration [ppm] / 1000) ppm/°C 0...10,000 ppm: typ. ± (1 + CO ₂ concentration [ppm] / 1000) ppm/°C |
| | 0...3 %: typ. -0,3 % from the measured value/°C |
| | 0...5 %: typ. -0,3 % from the measured value/°C |
| Measurement interval | adjustable from 15 s to 1 h (Factory setting: 15 s) |

General

| | |
|-------------------|---|
| Digital interface | Modbus RTU or E2 (details: www.epluse.com) |
| Supply voltage | 4.75 - 7.5 VDC |

1) For averaging output


| | |
|---|---|
| Average current consumption ²⁾ | 120 µA (at 1 h measurement interval)...4.3 mA (at 15 sec. measurement interval) |
| Current peak | max. 350 mA for 0.05 s |
| Housing / Protection class | Plastic PC / Housing IP65 |
| Electrical connection | Connector M12 x 1 |
| Cable length E2 interface | max. 10 m (32.8 ft) |
| Electromagnetic compatibility | EN61326-1 |
| (Industrial environment) | EN61326-2-3 |
| Operating conditions | -40...60 °C (-40...140 °F) 0...100 % RH (non-condensing) 85...110 kPa (12,33...15,95 psi) |
| Storage conditions | -40...60 °C (-40...140 °F) 0...100 % RH (non-condensing) 70...110 kPa (10,15...15,95 psi) |



2) The average current consumption depends on the measurement interval

Connection

Dimensions (mm/inch)

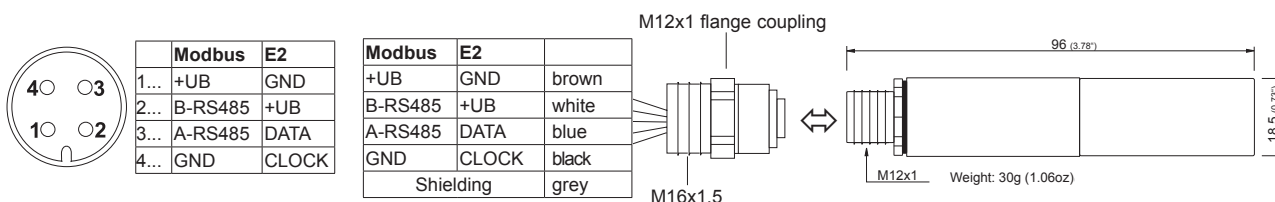

Modbus Map

The measured values are saved as a 32Bit *float* value from 0x2D to 0x30. The factory setting for the Slave-ID is 246 as an *integer* 16Bit value. This ID can be customised in the register 0x00 (permitted values 1 - 247).

FLOAT (read register):

| Coil / Register Numbers | Data-Addresses | Parameter name |
|-------------------------|----------------|--------------------------------------|
| 30046 | 0x2D | CO ₂ Response time = 60s |
| 30048 | 0x2F | CO ₂ Response time = 105s |


INTEGER (write register):

| Coil / Register Numbers | Data-Addresses | Parameter name |
|-------------------------|----------------|-------------------------|
| 60001 | 0x00 | Slave-ID |
| 60002 | 0x01 | RS485 Setting |
| 60003 | 0x02 | Measuring time interval |

For Modbus protocol setting please see Application Note (www.epluse.com/EE871).

Operation outdoors

For outdoor applications EE871 must be used with the radiation shield order no. HA010507, which protects the device against rain, snow, ice, and solar radiation.

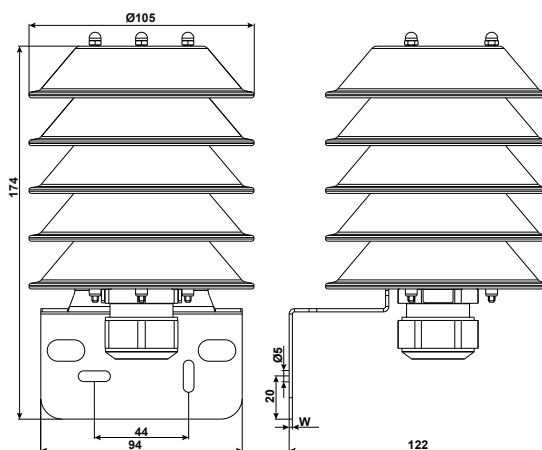

Scope of Supply

- EE871 probe according to ordering guide
- Test report according to DIN EN10204 - 2.2

Ordering Guide

| | | EE871 |
|------------------------|-----------------------|---------------------------------------|
| Hardware | CO ₂ Range | HR2000 HR5000 HR1 HR3 HR5 |
| | Digital Output | J2 no code |
| Software ¹⁾ | Baudrate | no code BD6 BD7 |
| | Parity | PY0 no code PY2 |
| | Stopbits | no code BT2 |
| | | |

1) Only for Modbus RTU

Ordering Example

EE871-HR5J2

CO₂ range: 0...5 %
 Digital Output: E2 Interface

EE871-HR2000PY2BT2

CO₂ range: 0...2000 ppm
 Digital Output: Modbus RTU
 Baudrate: 9600
 Parity: even
 Stopbits: 2

Accessories (For further information, see data sheet "Accessories")

| | |
|---|----------------|
| Mounting flange | HA010212 |
| M12x1 flanged coupling with 50mm (1,97") stranded wire | HA010705 |
| Modbus configuration adapter | HA011012 |
| E2 Test and configuration adapter | HA011010 |
| E+E Product configuration software (Download: www.epluse.com/Configurator) | EE-PCS |
| Connecting cable M12 - flying leads (1.5 m (59.06") / 5 m (196.85") / 10 m (393.70")) | HA010819/20/21 |
| T-Coupler M12 - M12 | HA030204 |
| M12 Connector for self assembly | HA010707 |
| PTFE filter cap | HA010116 |
| Radiation shield | HA010507 |
| Protection cap for the M12 cable socket | HA010781 |
| Protection cap for the M12 plug of EE871 | HA010782 |

Support Literature

www.epluse.com/EE871

